

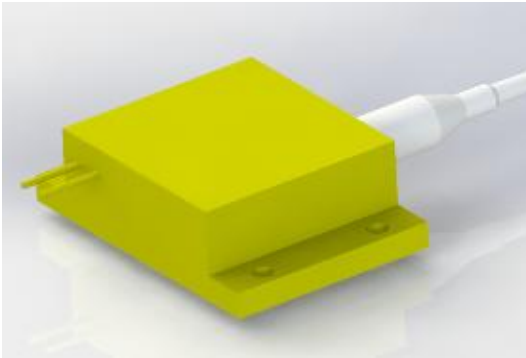


### T-Series High Power Laser Diode Module

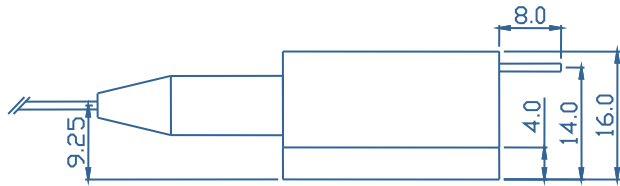


- Features
- ◆ High output power of 30 W
  - ◆ 105µm/0.22NA multimode optical fiber
  - ◆ Center wavelength 976±0.5nm
- Applications
- ◆ Fiber laser pumping
  - ◆ Material processing

### Package Dimensions (mm)

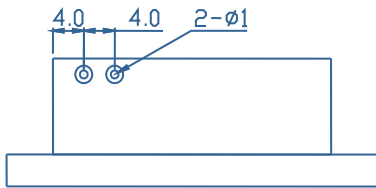

Pin-out Assignment	
Pin	Function
1	LD (+)
2	LD (-)

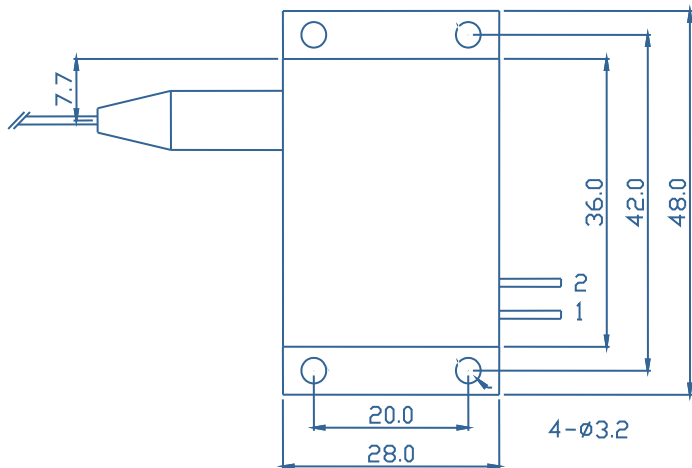

### Typical Device Performance (25°C)

	Min	Typical	Max	Unit
<b>Optical</b>				
CW Output Power	-	30	-	W
Center Wavelength	-	976±0.5	-	nm
Spectral Width (90% of Power)	-	<0.5	-	nm
Wavelength Shift with Temperature	-	0.02	-	nm /°C
<b>Electrical</b>				
Threshold Current	-	0.8	-	A
Operating Current	-	8.6	-	A
Operating Voltage	-	6.1	-	V
Slope Efficiency	-	3.8	-	W / A
Power Conversion Efficiency	-	57	-	%
<b>Fiber*</b>				
Fiber Core Diameter	-	105	-	μm
Fiber Cladding Diameter	-	125	-	μm
Fiber Buffer Diameter	-	250	-	μm
Numerical Aperture	-	0.22	-	-
Fiber Length	-	1-5	-	m
Fiber Connector	-	-	-	-

\* Customized fiber and connector available.

### Absolute Ratings

	Min	Max	Unit
Operating Temperature	15	35	°C
Operating Relative Humidity	-	75	%
Cooling Mode	-	Water cooling (25°C)	-
Storage Temperature	-20	80	°C
Storage Relative Humidity	-	90	%
Lead Soldering Temperature (10 s max)	-	250	°C